



SUPREME

MARBLE BRIDGE SAWS

CONTROL BOARD

The control board includes:

- Switch with release coil.
- Overheat protection with manual reset in the event of the disk jamming.
- Red light for net connection.
- Green light for machine on function.
- Laser instrument for the maximum cutting precision.

CUTTING DEPTH


A graduated scale measures the adjustment of the cutting depth by locking the engine group.

STORAGE

Built to reduce at the maximum the encumbrance during the carriage and above all the storage space.

Designed and made in Italy

| Article | SUPREME 55 | | SUPREME 85 | | SUPREME 100 | | SUPREME 120 | | SUPREME 150 | | SUPREME 200 | |
|----------------------------------|----------------------------------|------------|----------------------------------|------------|----------------------------------|------------|----------------------------------|------------|----------------------------------|------------|----------------------------------|------------|
| | Art. 8055 | Art. 80551 | Art. 8085 | Art. 80851 | Art. 8100 | Art. 81001 | Art. 8120 | Art. 81201 | Art. 8150 | Art. 81501 | Art. 8200 | Art. 82001 |
| CUTTING DISK Ø300 (int ø25,4mm.) | Optional | | Optional | | Optional | | Optional | | Optional | | Optional | |
| ENGINE | Single phase 230V/50Hz 3Hp/2,2Kw | | Single phase 230V/50Hz 3Hp/2,2Kw | | Single phase 230V/50Hz 3Hp/2,2Kw | | Single phase 230V/50Hz 3Hp/2,2Kw | | Single phase 230V/50Hz 3Hp/2,2Kw | | Single phase 230V/50Hz 3Hp/2,2Kw | |
| ROTATION SPEED | 2800 rpm. | | 2800 rpm. | | 2800 rpm. | | 2800 rpm. | | 2800 rpm. | | 2800 rpm. | |
| AMPEROMETRICAL PROTECTION | 13 A | | 13 A | | 13 A | | 13 A | | 13 A | | 13 A | |
| MAX CUTTING LENGTH | 550 mm. | | 850 mm. | | 1000 mm. | | 1200 mm. | | 1500 mm. | | 2000 mm. | |
| MAX CUTTING DEPTH AT 90° | 85 mm. | | 85 mm. | | 85 mm. | | 85 mm. | | 85 mm. | | 85 mm. | |
| MAX CUTTING DEPTH WITH 2 RUNS | 135 mm. | | 135 mm. | | 135 mm. | | 135 mm. | | 135 mm. | | 135 mm. | |
| MAX CUTTING DEPTH AT 45° | 60 mm. | | 60 mm. | | 60 mm. | | 60 mm. | | 60 mm. | | 60 mm. | |
| WORKING TABLE SIZE | 550 x 620 mm. | | 850 x 620 mm. | | 850 x 620 mm. | | 1200 x 620 mm. | | 1500 x 620 mm. | | 2050 x 625 mm. | |
| WATER RECYCLING PUMP TYPE | S3 standard | | S3 standard | | S3 standard | | S3 standard | | S3 standard | | S3 standard | |
| KIT WHEELS | Optional | Standard | Optional | Standard | Optional | Standard | Optional | Standard | Optional | Standard | Optional | Standard |
| LASER INSTRUMENT | Optional | Standard | Optional | Standard | Optional | Standard | Optional | Standard | Optional | Standard | Optional | Standard |
| DIMENSION MACHINE IN SERVICE | 770x1280x h. 1100 mm. | | 770x1580x h. 1100 mm. | | 770x1730x h. 1100 mm. | | 770x1930x h. 1100 mm. | | 770x2230x h. 1100 mm. | | 770x2710x h. 1280 mm. | |
| DIMENSION MACHINE IN STOCK | 720x1300x h. 1000 mm. | | 720x1600x h. 1000 mm. | | 720x1750x h. 1000 mm. | | 720x1950x h. 1000 mm. | | 720x2250x h. 1000 mm. | | 720x2750x h. 1000 mm. | |
| DIMENSION 3 MACHINES ON PALLET | 720x1300x h. 2260 mm. | | 720x1600x h. 2260 mm. | | 720x1750x h. 2260 mm. | | 720x1950x h. 2260 mm. | | 720x2250x h. 2260 mm. | | 720x2750x h. 2260 mm. | |
| NET WEIGHT | 75 Kg. | | 80 Kg. | | 83 Kg. | | 86 Kg. | | 92 Kg. | | 99 Kg. | |

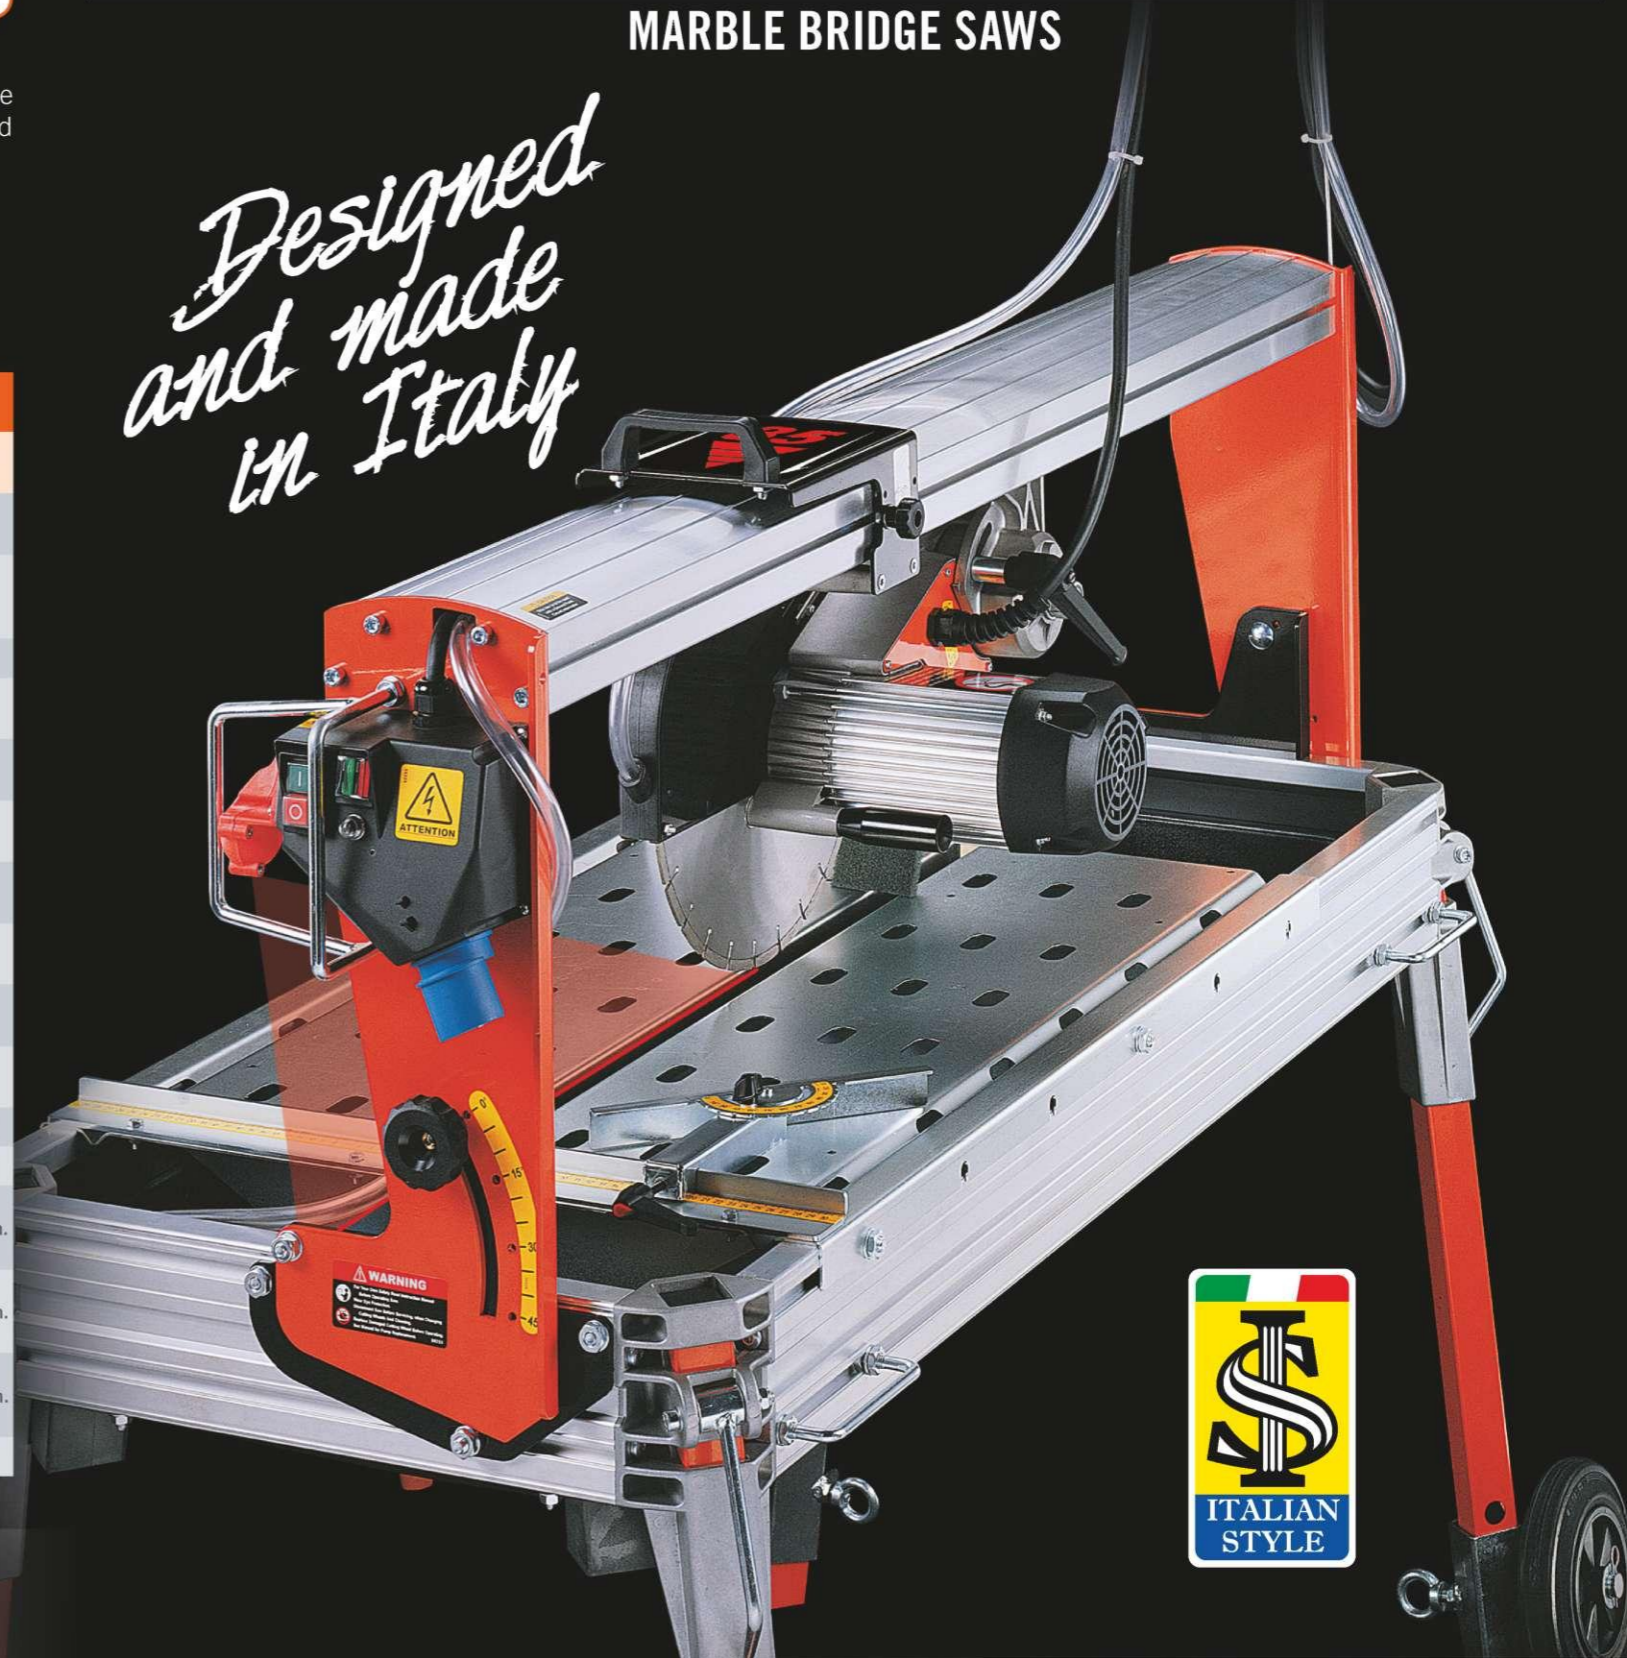

BATTIPAVTM
MACCHINE PER EDILIZIA | MACHINES FOR BUILDING

AUTHORIZED DEALER:



Z. i. 2 - Via Cavatorta, 6/1 | 48010 Cotignola (Ra) | ITALY
Tel. +39 0545 40004 | Fax +39 0545 41724
www.battipav.com | sales@battipav.com

July 2012

APPLICATION

Built to cut natural-stones, granite and marble slabs with diamond disk Ø 300 mm.

